

## Ethernet based lidar components

### Overview:

The Ethernet based components for Lidar automation provide remote control for laser monitoring, timing parameters, detectors and transient recorders. The modules are building blocks for highly integrated detection systems.


Ethernet is a modern, easy to use and very scalable system control technology. It fits perfectly to any PC. You can run your whole system from a laptop with an internet connection.

### Laser Power Monitor:

Monitoring every laser shot is the optimum approach to detect laser pulse energy fluctuations, SHG and THG efficiency changes and flashlamp degradation of your laser . A laser spot reflection can be measured using a photodiode or a laser power meter.

specifications:

input:	photodiode/power meter
resolution:	10bit
max. rep. rate	100Hz

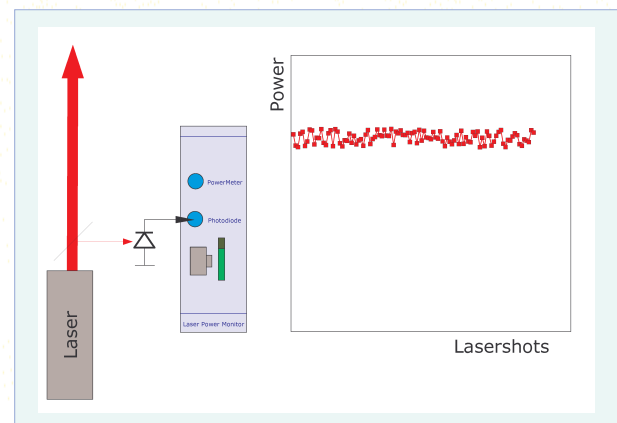


### Timing Control:

Control the laser, the transient recorder and the gating from a single integrated module instead of using an external pulse generator. The module provides all necessary trigger signals: laser flashlamp, laser Q-switch, transient recorder and gating. Use these signals to setup a pretrigger solution where the laser can be either master or slave.

specifications:

Laser lamp out :	5V into 50 $\Omega$ , BNC
Lamp out frequency:	0,32 Hz - 50 Hz
Acquisition out :	5V into 50 $\Omega$ , BNC
Acquisition out delay:	0.2 $\mu$ s - 13104 $\mu$ s
Q-switch out:	5V into 50 $\Omega$ , BNC
Q-switch out delay:	0.013 $\mu$ s - 819 $\mu$ s
Gate out delay:	0.013 $\mu$ s - 819 $\mu$ s

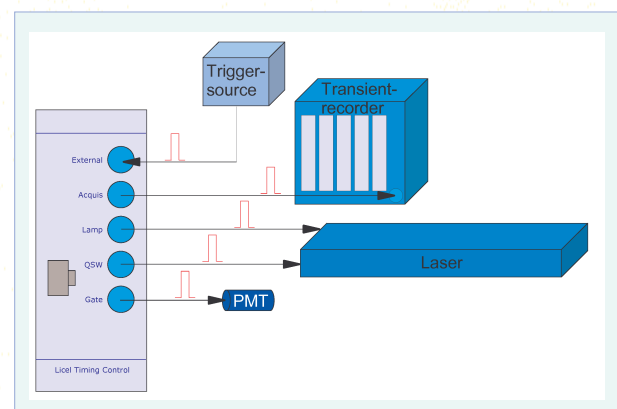

# Ethernet based lidar components

## **PMT/APD Control:**

Remote controlling the detectors helps to optimize automated lidars. You can prevent signal saturation (low clouds), react on high or low solar background.

Without manual controls more compact systems can be built.

### **PMT Remote 8:**

Remote control for PMT modules.

No. of PMTs to control: up to 8  
high voltage set/read accuracy: +/-1V

### **APD Remote 4:**

Remote control for APD modules.

No. of . APDs to control: up to 4  
high voltage set/read accuracy: +/-1V  
APD cooling control: on/off  
Temp. in range monitor


## **Transient Recorder Control:**

Controlling the transient recorder over Ethernet allows to place the acquisition rack as close as possible to the detectors. The PC can be located anywhere in the LAN.

Older systems can be upgraded with this module, the software structure is very similar to make the transition smooth.

### **Transient recorder control:**

No. of transient recorders: up to 16  
trigger: global trigger input  
compatible to DIO-32HS interface

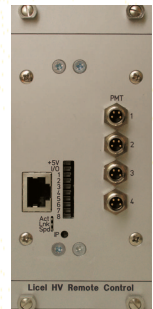

## **Specifications for all Ethernet modules:**

### **Data Interface:**

Ethernet: 10/100 MB/s  
Ethernet address: DHCP or manual

### **Software:**

Executables and LabVIEW software source code is supplied. An additional C-based driver is available.

### **Mechanics:**

All Ethernet modules can be mounted into 3 height unit cassettes or on the rear panel of the transient recorder rack.

### **Environmental conditions:**

Operating temperature: 0°C to 30°C  
(non condens.)  
Storage temperature: -40°C to 70°C

## **International distribution:**

### **Asian Pacific Rim:**

Electronics Optics Res., Ltd.  
3-fl., Onoda Building,  
4-26-19, Koenzi-Minami-Ku  
Tokyo 166, Japan  
phone 03-3314-5699  
fax 03-3314-2333  
email eor@tkd.att.ne.jp  
www.eor.jp

### **USA:**

Boston Electronics Corp.  
91 Boylson Street  
Brookline MA 02445  
phone (800)347-5445  
fax (617)731-0935  
e-mail: boselec@boselec.com  
www.boselec.com

### **United Kingdom:**

Photonic Solutions PLC  
Gracemount Business Pavillons,  
40 Captains Road,  
Unit A2/A3, Edinburgh, EH17 8QF  
phone: 0131 664 8122  
fax: 0131 664 8144  
email: sales@psplc.com  
www.psplc.com

### **other countries:**

Licel GmbH  
Chausseestr. 34/35  
D-10115 Berlin  
phone +49.30.283 917 37  
fax +49.30.283 917 38  
e-mail: info@licel.com  
www.licel.com